

LUXPOWER® SERIES **N**5



575W Mono
144 Half-Cell Layout
M10 N-TOPCon Cell



LECO N-TOPCon Cell Technology



Half Cut Cell Technology



SMBB Technology



Excellent Anti-PID Low LID Performance




Less Hot Spot Shading Effects



Higher Power Output Lower BOS & LCOE

Linear performance Warranty

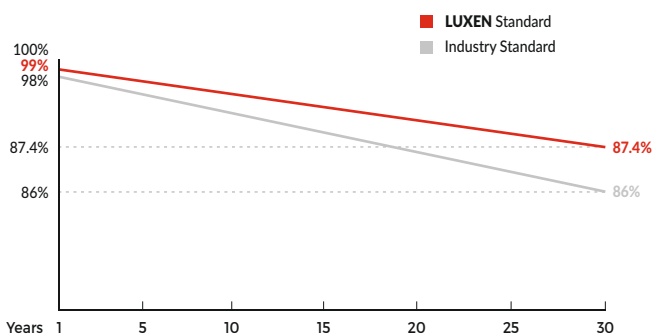

Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests



LUXEN SOLAR ENERGY CO., LTD.

Manufacturer: A301, Zhongyi Building, No.59 Wuzhong Avenue, Wuzhong District, Suzhou, 215168, China


Factory: No.1 Haiyue Road, Suxitong Industrial Park, Nantong, 226000, China

T: +86 512 6708 1572 | F: +86 512 6708 1570 | sales@luxensolar.com

www.luxensolar.com

MECHANICAL CHARACTERISTICS


Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2278 x 1134 x 35mm
Weight	27.5kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

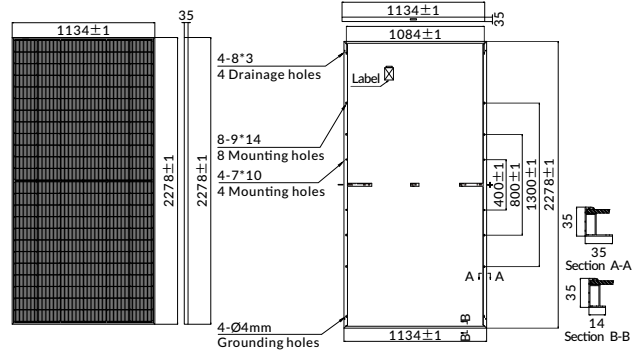

ELECTRICAL PARAMETERS

POWER CLASS	LNVU-575N	
	STC	NMOT
Maximum power (Pmax)	575W	433W
Open Circuit Voltage (Voc)	51.44V	48.96V
Short Circuit Current (Isc)	14.26A	11.51A
Voltage at Maximum power (Vmpp)	42.94V	39.76V
Current Maximum Power (Impp)	13.39A	10.89A
MODULE EFFICIENCY (%)	22.26%	
STC: Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G		

PACKING CONFIGURATION		
Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	5	20
Pieces per container	155	620

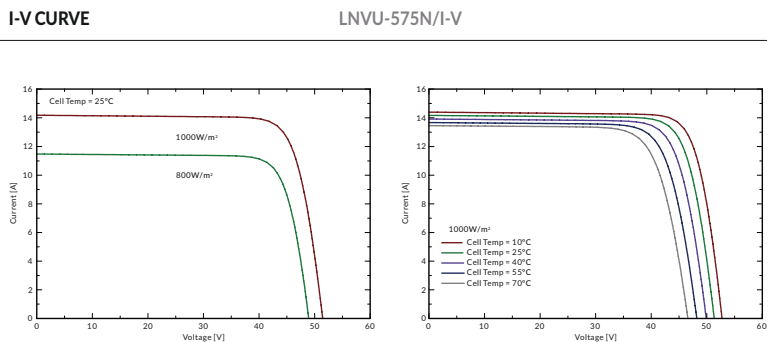

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. LUXEN SOLAR reserves the right to modify the information any time without prior notice.