


LUXPOWER® SERIES N5



620-640W Mono 144 Half-Cell Layout M10R N-TOPCon Cell

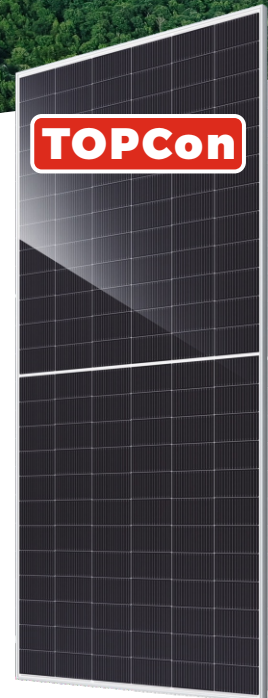

LECO N-TOPCon Cell Technology



Half Cut Cell Technology




SMBB Technology



Excellent Anti-PID Low LID Performance




Less Hot Spot Shading Effects



Higher Power Output Lower BOS & LCOE

Linear Performance Warranty

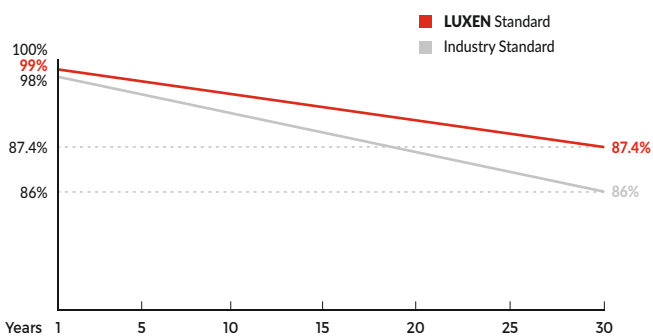

* LUXEN TOPCon: Standard warranty 15 years, can be extended up to 20 years.

Insured By



Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests




LUXEN SOLAR ENERGY CO., LTD.

Operational HQ: Vienna Technology Center, Christine-Touaillon-Strasse 11/2.01, 1220 Vienna, Austria
 Production HQ: No.1, Haiyue Road, Nantong, Jiangsu, 226000, China
 europe@luxensolar.at

www.luxensolar.com

MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2465 x 1134 x 35mm
Weight	30.0kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	280mm (+) / 350mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

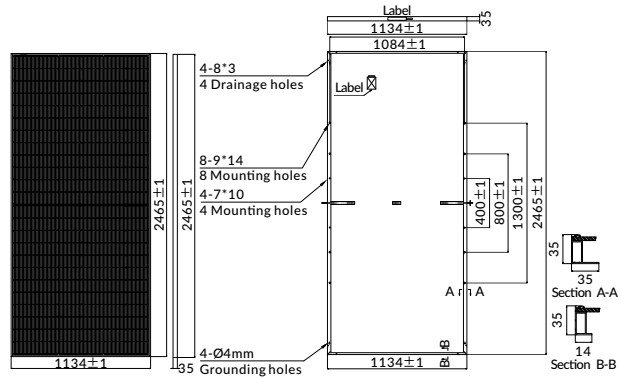

ELECTRICAL PARAMETERS

POWER CLASS	LNCU-620N		LNCU-625N		LNCU-630N		LNCU-635N		LNCU-640N	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	620W	467W	625W	471W	630W	475W	635W	479W	640W	483W
Open Circuit Voltage (Voc)	51.98V	49.20V	52.17V	49.41V	52.36V	49.62V	52.54V	49.82V	52.73V	50.02V
Short Circuit Current (Isc)	15.16A	12.13A	15.22A	12.18A	15.28A	12.22A	15.34A	12.27A	15.40A	12.32A
Voltage at Maximum power (Vmpp)	43.39V	40.85V	43.55V	41.03V	43.72V	41.20V	43.88V	41.38V	44.05V	41.55V
Current Maximum Power (Impp)	14.29A	11.43A	14.35A	11.48A	14.41A	11.53A	14.47A	11.58A	14.53A	11.62A
MODULE EFFICIENCY (%)	22.18%		22.36%		22.54%		22.72%		22.90%	



STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G

PACKING CONFIGURATION

Container	40'HQ
Pieces per pallet	31
Pallets per container	16
Pieces per container	496

I-V CURVE

LNCU-630N/I-V

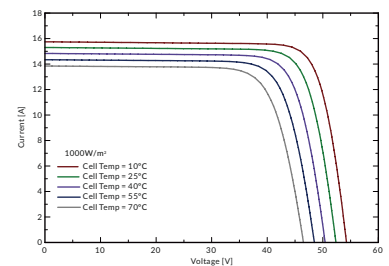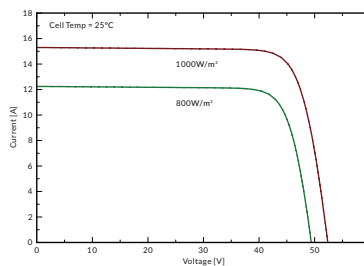

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. LUXEN SOLAR reserves the right to modify the information any time without prior notice.