

LUXPOWER® SERIES 6

670W Mono
132 Half-Cell Layout
M12/210mm Cell



Ideal Choice For Large Scale Ground Installation



High Density Interconnect Technology



Gallium-doped Technology



Anti-PID Low LID Performance




Less Hot Spot Shading Effects



Lower BOS & LCOE

Linear performance Warranty

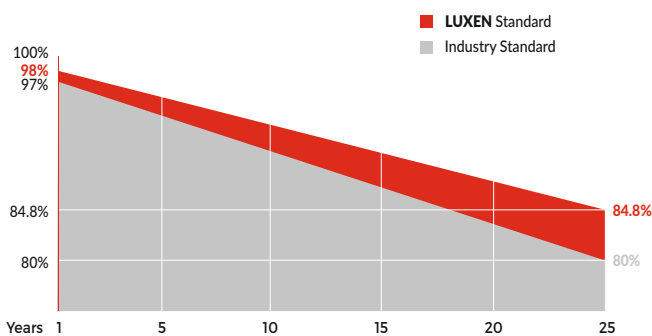

Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests



LUXEN SOLAR ENERGY CO., LTD.

Manufacturer: A301, Zhongyi Building, No.59 Wuzhong Avenue, Wuzhong District, Suzhou, 215168, China


Factory: No.1 Haiyue Road, Suxitong Industrial Park, Nantong, 226000, China

T: +86 512 6708 1572 | F: +86 512 6708 1570 | sales@luxensolar.com

www.luxensolar.com

MECHANICAL CHARACTERISTICS


Solar Cells	Mono
No. of Cells	132 (6x22)
Dimensions	2384 x 1303 x 35mm
Weight	34.0kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
Output Cables	4.0mm ² 300mm (+) / 300mm (-) Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

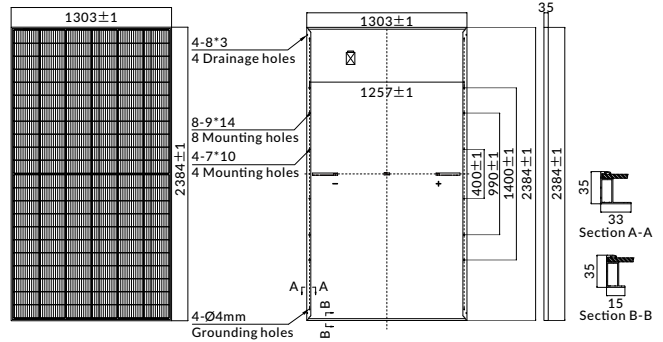

ELECTRICAL PARAMETERS

POWER CLASS	LNET-670M	
	STC	NMOT
Maximum power (Pmax)	670W	510W
Open Circuit Voltage (Voc)	45.71V	41.92V
Short Circuit Current (Isc)	18.78A	15.66A
Voltage at Maximum power (Vmpp)	38.22V	34.79V
Current Maximum Power (Impp)	17.53A	14.66A
MODULE EFFICIENCY (%)	21.60%	
STC: Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G		

PACKING CONFIGURATION	
Container	40'HQ
Pieces per pallet	32
Pallets per container	18
Pieces per container	576

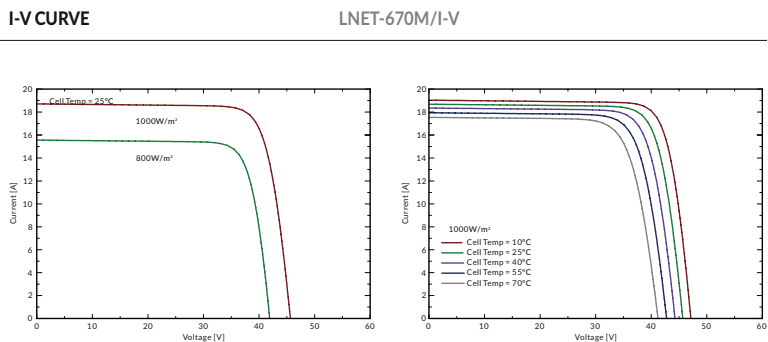

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	43±2°C
Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.04%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. LUXEN SOLAR reserves the right to modify the information any time without prior notice.